

PMST – 4 Channel Pyro Monitor System Tester






General Description:

The Skylink Technology Pyro Monitor System Tester (PMST) STE is used to test out the Pyro Monitoring System. Similar units have been used to fire spacecraft pyros for flight verification.

Details:

- Programmable Voltage Levels for the output signal: 6.5V – 14V and 20V – 40V.
- Switchable pulse width 40ms or 100ms
- Switchable series resistance 2.1 Ohms or 5.6 Ohms.
- May be operated manually or via a user interface from a PC.
- Test points on all 4 Channels
- Test point for the applied voltage



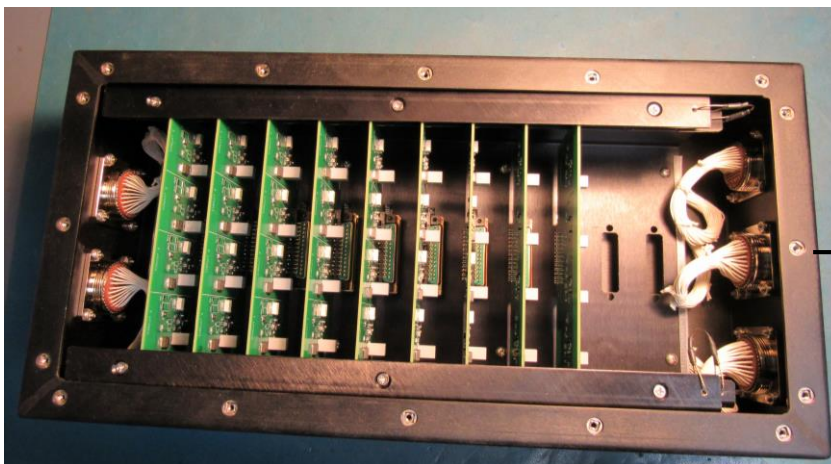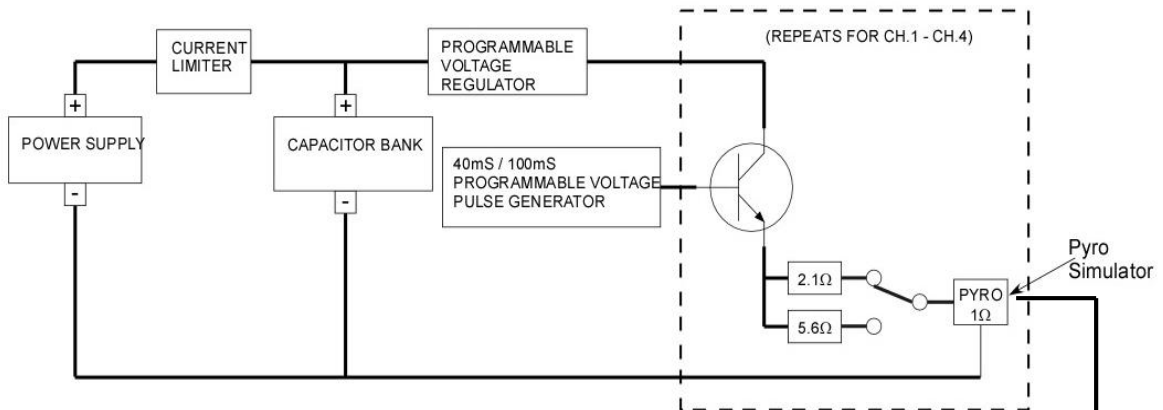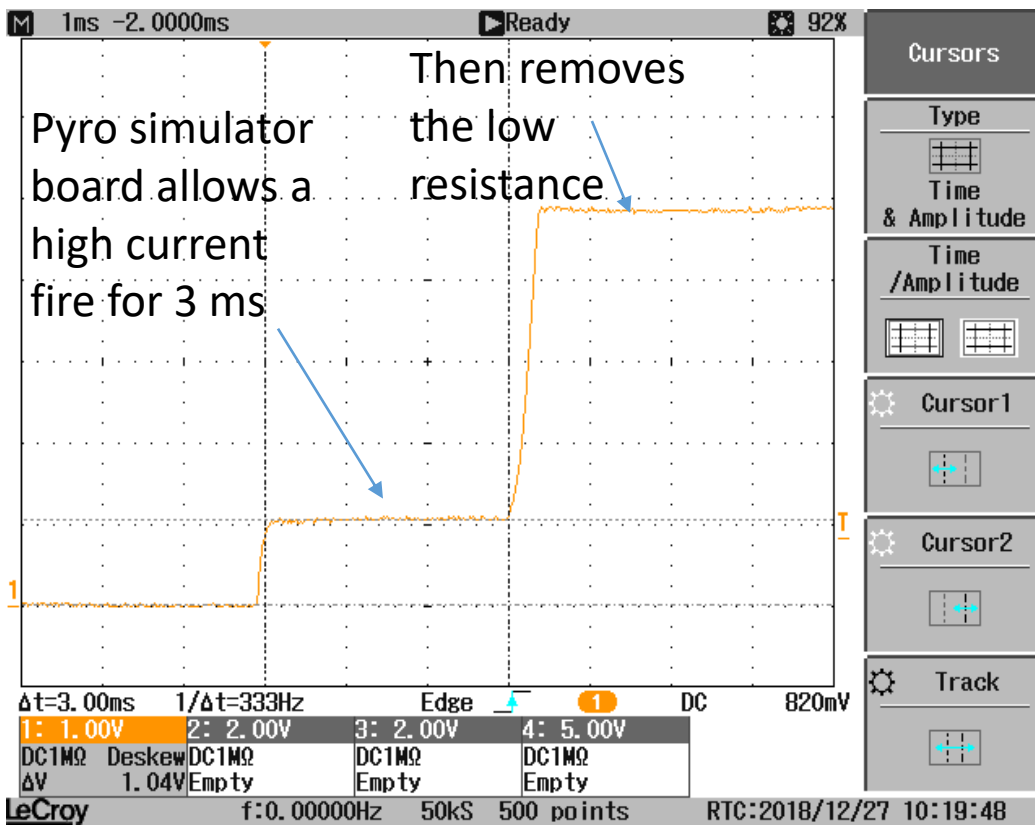

SKYLINK PYRO SIMULATOR STE